微信二维码

网站二维码

宁波固耐轴承有限公司

NINGBO GUNAI BEARING CO., LTD.

地址：浙江省余姚市朗霞街道龙王堂村

联系人：张总

手机：13968355531

网址：www.nbgnb.com

ADD:Longwangtang Village, Langxia Subdistrict, Yuyao City, Zhejiang Province

CONTACT:Mr. Zhang

MOB:13968355531

WEBSITE:www.nbgnb.com



GUNAI 固耐轴承 BEARING

COMPANY PROFILE
公司简介



宁波固耐轴承有限公司是一家专业生产微小型、中型低噪音滚动轴承和各种非标轴承的私营企业，产品涉及：深沟球轴承，圆柱滚子轴承，圆锥滚子轴承，调心滚子轴承，角接触球轴承，推力球轴承，推力滚子轴承，关节轴承，高温轴承等系列。公司位于风景秀丽的杭州湾畔——浙江余姚。

公司已通过ISO9001-2016国际质量管理体系认证，公司拥有自营进出口权，年生产能力达3000万套。技术实力雄厚、生产工艺先进，测试手段完备，产品广泛用于电动工具、摩配、纺织器材，仪表仪器、医疗器械、电子计算机、精密仪器、运动器材等领域。产品采用高于国家标准的企业标准进行生产，一如既往为广大新老客户提供优质的产品、精心打造轴承行业知名品牌。

公司生产的轴承，产品质量可靠，价格合理，综合性能稳定，而且交货期快，多年来深受广大用户的信赖，畅销国内外。拥有专业的技术销售人员迅速回复客户的问价，随时为客户提供技术服务，为客户提供优质的售前售后服务。

公司秉承“质量是未来，服务是信誉，创新是动力，合作是财富”的宗旨。坚持“潜心管理，质量为本，锐意创新，打造品牌”的质量方针，积极进行技术改造和管理创新，充分将个性价值和团体合作精神有机结合，竭诚为用户提供优质的产品和全面的服务。

Ningbo Gunai Bearing Co., Ltd. is a privately-owned enterprise specialising in the manufacture of micro, small and medium-sized low-noise rolling bearings, as well as various non-standard bearings. Its product range includes: deep groove ball bearings, cylindrical roller bearings, tapered roller bearings, self-aligning roller bearings, angular contact ball bearings, thrust ball bearings, thrust roller bearings, spherical plain bearings and high-temperature bearings. The company is situated in Yuyao, Zhejiang, on the picturesque shores of Hangzhou Bay.

The company has obtained ISO 9001:2016 international quality management system certification, holds its own import and export rights, and has an annual production capacity of 30 million sets. With strong technical capabilities, advanced production processes and comprehensive testing facilities, our products are widely used in sectors such as power tools, motorcycle components, textile machinery, measuring instruments, medical devices, computers, precision instruments and sports equipment. Manufactured to corporate standards that exceed national standards, we remain committed to providing high-quality products to both new and existing customers, whilst striving to build a renowned brand within the bearing industry.

The bearings manufactured by the company are characterised by reliable quality, reasonable prices and consistent overall performance, whilst also offering fast delivery times. For many years, they have enjoyed the trust of a wide range of customers and are in high demand both domestically and internationally. The company employs a team of professional technical sales staff who respond promptly to customer enquiries, provide technical support at all times, and deliver high-quality pre-sales and after-sales service.

The company adheres to the principle that ‘quality is the future, service is reputation, innovation is the driving force, and cooperation is wealth’. Upholding the quality policy of ‘dedicated management, quality as the foundation, bold innovation, and brand building’, it actively pursues technological upgrades and management innovation, seamlessly integrating individual value with a spirit of teamwork, and is committed to providing customers with high-quality products and comprehensive services.

CERTIFICATION
资质认证

NBGNB



上海赛威认证有限公司

质量管理体系认证证书

证书编号：SW25Q20095R0S

兹证明

宁波固耐轴承有限公司

组织机构代码/统一社会信用代码：91330281MA2CLDW3XU

注册地：浙江省余姚市朗霞街道龙王堂村

生产/经营地：浙江省余姚市朗霞街道龙王堂村

质量管理体系符合标准：

GB/T19001-2016/ISO9001:2015

管理体系认证范围：

微小型滚动轴承的生产

（签发人）

初次获证：2025 年 01 月 19 日

颁证日期：2025 年 01 月 19 日

有效期至：2028 年 01 月 18 日

IAF

CNAS

中国认可 国际互认 管理体系 MANAGEMENT SYSTEM CNAS C201-M

证书专用章

本证书三年有效期内每间12个月须经至一次监督审核，并经年度确认书一起使用方可有效。

证书有效性可登录国家认监委官方网站 www.cnca.gov.cn 或扫描二维码查询。



SHANGHAI SAILWAY CERTIFICATION CO.,LTD.

QUALITY MANAGEMENT SYSTEM CERTIFICATE

Certificate Number: SW25Q20095R0S

This is to Certify that the Quality Management System of

Ningbo Gunai Bearing Co., Ltd.

Organization Code/Unified Social Credit Code: 91330281MA2CLDW3XU

Registration Address: Longwangtang Village, Langxia Subdistrict, Yuyao City, Zhejiang Province

Production/Business Address: Longwangtang Village, Langxia Subdistrict, Yuyao City, Zhejiang Province

Has been Audited to Conform to the Following Quality Management System Standard:

GB/T19001-2016/ISO9001:2015

for the Scope of Registration:

Production of Miniature Rolling Bearings.

(Issued By)

Date of Initial: Jan 19, 2025

Date of Issue: Jan 19, 2025

Date of Expiry: Jan 18, 2028

IAF

CNAS

中国认可 国际互认 管理体系 MANAGEMENT SYSTEM CNAS C201-M

证书专用章


质量是固耐轴承成长与发展的根本，固耐轴承一直把提高产品质量，提高服务质量作为固耐轴承发展的长期策略。固耐轴承通过了GB/T 19001-2016 / ISO9001:2015质量管理体系标准，并长期坚持执行和改进。同时所有固耐生产的轴承符合RoHs & REACH指标。

Quality is the key point for the Gunai Bearing's growth and development, which always regards the improvement of high quality and service as the long-term development strategy.
Gunai Bearing has has obtained certification to the GB/T 19001-2016 / ISO 9001:2015 Quality Management System standard, maintaining consistent implementation and continuous improvement. Furthermore, all bearings manufactured by Gunai comply with RoHS and REACH directives.



固耐轴承推行“6S”固定的现场管理模式，包括整理、整顿、清扫、清洁、素养、安全。员工们坚持检查和评估。现在，它已经成为固耐轴承每位员工的良好习惯，共同关注质量并保持清洁生产。


Gunai Bearing has pursued"6s"management mode, in which is spot management the core idea is fixation , including Seiri, Seiton Seiso, Seiketsu, Shitsuke, Safety. Our workers have insisted on examining and assessing, Now, it has formed a good habit in Gunai Bearing that everyone concerns the quality and aims to maintain clean production.

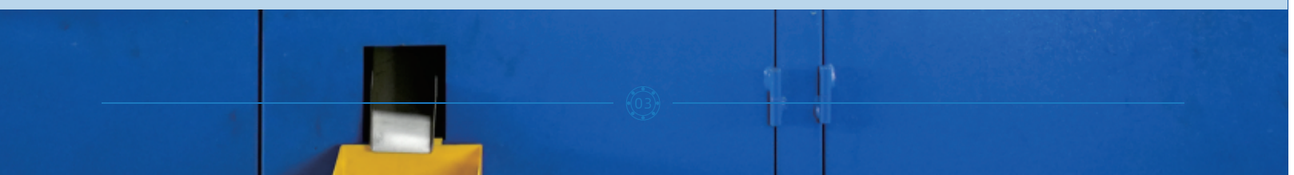


PRODUCTION FACILITIES
生产设施

NBGNB



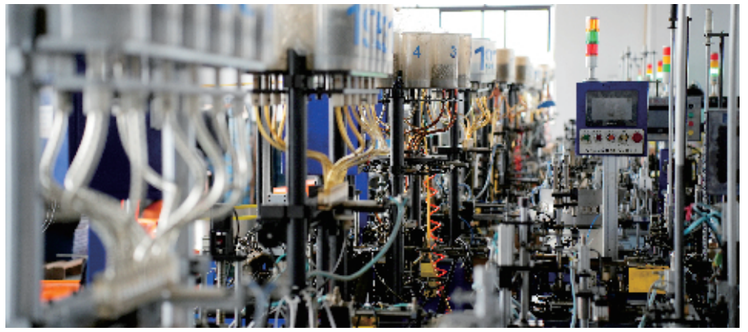

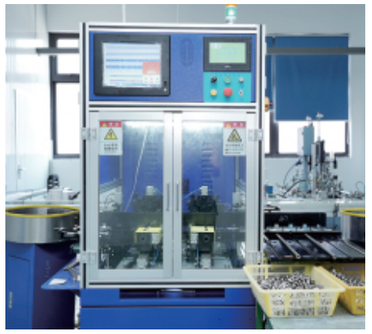






APPLICATION AREAS
应用领域

部分工业产品应用



汽车
Automoblie



农业机械
Farm machinery



园林机械
Garden tool



水泵
Water pump



摩托车
Motorcyle



电动工具
Electric tool



纺织机械
Textile machinery



风力发电
Wind generator



电机
Electric motor



电梯
Lift

固耐轴承作为工业产品零部件被广泛的应用于汽车、摩托车、水泵、电动工具、空压机、减速机、工业电机、发电机、纺织机械、农用机械、传送设备、建筑设备、机床、电梯等等;

Gunai Bearing are widely used inautomobile,motorcycle,water pump,electric tools,air compressor,reducer industrial machines,generator,textile machines,agricutural machines,transmission equipment,architecture equipment,machine toos,lift etc.

NBGNB

部分家用产品应用

固耐轴承也被广泛地应用于家电产品和办公设备如，空调、洗衣机、吸尘器、按摩椅、缝纫机、油烟机、微波炉、复印机等等;

Gunai Bearing are also widely used in household appliance and office equipment, such as air conditioner,Washer,cleaner,massage air chair, sewing machine, range hood, micro-wave oven, duplicating machine.



空调
Air-condition



吸尘器
Vacuum cleaner



跑步机
Fitness equipment



复印机
Office equipment



冰箱
Refrigerator



缝纫机
Sewing machine



医疗器材
Medical instrument



按摩椅
Massage chair



洗衣机
Washing machine



微波炉
Vacuum cleaner



油烟机
Range hood



轮滑鞋
Roller skates

BEARING ACCURACY
轴承精度

滚动轴承主要尺寸的公差、公差值及旋转精度，在国家标准GB/T307.1中有规定。这些公差和ISO、JIS标准对照如下：

There are stipul ations to the roller bearing major size tolerance, admittance valure, rotating precision in the National standard of GB/T307.1。The following is acomparison table between these tolerance and ISO、JIS standards

标准公差等级/Standard allowable tolerance grades

GB\T307.1	P0	P6	P5	P4	P2
ISO 492	Normal class	Class 6	Class 5	Class 4	Class 2
JIS B 1514	JIS 0级	JIS 6级	JIS 5级	JIS 4级	JIS 2级
AFBMA STD.20	ABEC-1	ABEC-3	ABEC-5	ABEC-7	ABEC-9

内圈成品/ Inner ring tolerances(finished product)

Tolerance unit: μ m

公差等级 Tolerances Class	d mm		△dmp		△ds		Vdsp 直径系列 Diameter series			Vdmp	Kia	SD	Sia	△BS		VBS
							9	0、1	2、3、4							
	超过 Exceed	到 to	上偏差 max	下偏差 min	上偏差 max	下偏差 min	最大 max			最大 max				上偏差 max	下偏差 min	最大 max
P0 (ABEC-1)	0.6	2.5	0	-8	/	/	10	8	6	6	10	/	/	0	-40	12
	2.5	10		-8	/	/	10	8	6	6	10	/	/		-120	15
	10	18		-8	/	/	10	8	6	6	10	/	/		-120	20
	18	30		-10	/	/	13	10	8	8	13	/	/		-120	20
	30	50		-12	/	/	15	12	9	9	15	/	/		-120	20
	50	80		-15	/	/	19	19	11	11	20	/	/		-150	25
P6 (ABEC-3)	0.6	2.5	0	-7	/	/	9	7	5	5	5	/	/	0	-40	12
	2.5	10		-7	/	/	9	7	5	5	6	/	/		-120	15
	10	18		-7	/	/	9	7	5	5	7	/	/		-120	20
	18	30		-8	/	/	10	8	6	6	8	/	/		-120	20
	30	50		-10	/	/	13	10	8	8	10	/	/		-120	20
	50	80		-12	/	/	15	15	9	9	10	/	/		-150	25
P5 (ABEC-5)	0.6	2.5	0	-5	/	/	5	4		3	4	7	7	0	-40	5
	2.5	10		-5	/	/	5	4		3	4	7	7		-40	5
	10	18		-5	/	/	5	4		3	4	7	7		-80	5
	18	30		-6	/	/	6	5		3	4	8	8		-120	5
	30	50		-8	/	/	8	6		4	5	8	8		-120	5
	50	80		-9	/	/	9	7		5	5	8	8		-150	6
P4 (ABEC-7)	0.6	2.5	0	-4	0	-4	4	3		2	2.5	3	3	0	-40	2.5
	2.5	10		-4		-4	4	3		2	2.5	3	3		-40	2.5
	10	18		-4		-4	4	3		2	2.5	3	3		-80	2.5
	18	30		-5		-5	5	4		2.5	3	4	4		-120	2.5
	30	50		-6		-6	6	5		3	4	4	4		-120	3
	50	80		-7		-7	7	5		3.5	4	5	5		-150	4

BEARING ACCURACY
轴承精度

NBGNB

外圈成品/ outer ring tolerances (finished product)

Tolerance unit: μ m

公差等级 Tolerances Class	D mm		△Dmp		△Ds		VDsp 开型 Open			闭型 Close	VDmp	Kea	SD	Sea	△CS		VCS
							9	0、1	2、3、4	0、1、2 3、4							
	超过 Exceed	到 to	上偏差 max	下偏差 min	上偏差 max	下偏差 min	最大 max				最大 max				上偏差 max	下偏差 min	最大 max
P0 (ABEC-1)	2.5	6	0	-8	/	/	10	8	6	10	6	15	/	/	与同一轴承 内圈的 △Bs及VBs相同		
	6	18		-8	/	/	10	8	6	10	6	15	/	/			
	18	30		-9	/	/	12	9	7	12	7	15	/	/			
	30	50		-11	/	/	14	11	8	16	8	20	/	/			
	50	80		-13	/	/	16	13	10	20	10	25	/	/			
	80	120		-15	/	/	19	19	11	26	11	35	/	/			
P6 (ABEC-3)	2.5	6	0	-7	/	/	9	7	5	9	5	8	/	/			
	6	18		-7	/	/	9	7	5	9	5	8	/	/			
	18	30		-8	/	/	10	8	6	10	6	9	/	/			
	30	50		-9	/	/	11	9	7	13	7	10	/	/			
	50	80		-11	/	/	14	11	8	16	8	13	/	/			
	80	120		-13	/	/	16	16	10	20	10	18	/	/			
P5 (ABEC-5)	2.5	6	0	-5	/	/	5	4			3	5	4	8	与同一轴承 内圈的 △Bs相同		5
	6	18		-5	/	/	5	4			3	5	4	8			5
	18	30		-6	/	/	6	5			3	6	4	8			5
	30	50		-7	/	/	7	5			4	7	4	8			5
	50	80		-9	/	/	9	7			5	8	4	10			6
	80	120		-10	/	/	10	8			5	10	4.5	11			8
P4 (ABEC-7)	2.5	6	0	-4	0	-4	4	3			2	3	2	5			2.5
	6	18		-4		-4	4	3			2	3	2	5			2.5
	18	30		-5		-5	5	4			2.5	4	2	5			2.5
	30	50		-6		-6	6	5			3	5	2	5			2.5
	50	80		-7		-7	7	5			3.5	5	2	5			3
	80	120		-8		-8	8	6			4	6	2.5	6			4

CLEARANCE
游隙

小型球轴承（D≥9，d<10）、微型轴承（D<9）的径向游隙。

Radial internal clearance of small（D≥9，d<10）and miniature（D<9）bearing

游隙代号 Clearance mark	MC1		MC2		MC3		MC4		MC5		MC6	
游　隙	min	max	min	max	min	max	min	max	min	max	min	max
	0	5	3	8	5	10	8	13	13	20	20	28

备注：标准游隙为MC3/Note:Standard clearance is MC3

电机轴承径向游隙/ Radial clearance of motor bearing

unit: μm

内径 Inner diameter d（mm）		游隙 Clearance CM	
超过 over	到 To	最大 Min.	最小 Min.
2.5	10	3	10
10	18	4	11
18	30	5	12
30	50	9	17
50	80	12	22

深沟球轴承的径向游隙/ Nominal bearing inner diameter

unit: μm

公称轴承内径 Nominal bearing inner diameter d (mm)		径　向　游　隙 Radial clearance									
		C2		CN(C0)		C3		C4		C5	
超过 Exceed	到 To	min	max	min	max	min	max	min	max	min	max
2.5	6	0	7	2	13	8	23	-	-	-	-
6	10	0	7	2	13	8	23	14	29	20	37
10	18	0	9	3	18	11	25	18	33	25	45
18	24	0	10	5	20	13	28	20	36	28	48
24	30	1	11	5	20	13	28	23	41	30	53
30	40	1	11	6	20	15	33	28	46	40	64
40	50	1	11	6	23	18	36	30	51	45	73
50	65	1	15	8	28	23	43	38	61	55	90
65	80	1	15	10	30	25	51	46	71	65	105
80	100	1	18	12	36	30	58	53	84	75	120

PRODUCT SERIES
产品系列

NBGNB

60 系列轴承参数表/ 60 SERIES

轴承型号 Bearing NO.			额定负荷（kN） Load Rating		极限转速（rpm） Limiting Speed			外形尺寸（mm） Boundary dimensions				重量 Weight
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin	开式 Open (kg)
					RS.2RS	Open.Z.ZZ						
604	604-zz	604-2RS	0.97	0.36	43000	48000	56000	4	12	4	0.2	0.0029
605	605-zz	605-2RS	1.33	0.55	38000	40000	50000	5	14	5	0.2	0.005
606	606-zz	606-2RS	1.51	0.74	34000	38000	45000	6	17	6	0.3	0.006
607	607-zz	607-2RS	2.22	0.91	32000	36000	43000	7	19	6	0.3	0.007
608	608-zz	608-2RS	3.32	1.38	28000	34000	40000	8	22	7	0.3	0.012
609	609-zz	609-2RS	3.35	1.40	24000	32000	34000	9	24	7	0.3	0.016
6000	6000-zz	6000-2RS	4.58	1.98	22000	31000	36000	10	26	8	0.3	0.019
6001	6001-zz	6001-2RS	5.10	2.38	18000	28000	32000	12	28	8	0.3	0.021
6002	6002-zz	6002-2RS	5.58	2.85	15000	24000	28000	15	32	9	0.3	0.026
6003	6003-zz	6003-2RS	6.00	3.25	13000	22000	26000	17	35	10	0.3	0.039
6004	6004-zz	6004-2RS	9.38	5.02	11000	18000	20000	20	42	12	0.6	0.069
6005	6005-zz	6005-2RS	10.06	5.67	9500	15000	18000	25	47	12	0.6	0.075
6006	6006-zz	6006-2RS	13.20	8.25	8000	13000	15000	30	55	13	1.0	0.09
6007	6007-zz	6007-2RS	16.20	10.30	6700	11000	13000	35	62	14	1.0	0.1
6008	6008-zz	6008-2RS	17.00	11.80	6000	10000	12000	40	68	15	1.0	0.19
6009	6009-zz	6009-2RS	21.00	14.80	5600	9000	11000	45	75	16	1.0	0.24
6010	6010-zz	6010-2RS	22.00	16.20	5000	8500	10000	50	80	16	1.0	0.26
60/22	60/22-zz	60/22-2RS	9.40	5.05	10000	13000	17000	22	44	12	0.6	0.074
60/28	60/28-zz	60/28-2RS	12.50	7.40	8400	10000	14000	28	52	12	0.6	0.096
60/32	60/32-zz	60/32-2RS	15.10	8.15	7200	8700	12000	32	58	13	1.0	0.122

62 系列轴承参数表/ 62 SERIES

轴承型号 Bearing NO.			额定负荷（kN） Load Rating		极限转速（rpm） Limiting Speed			外形尺寸（mm） Boundary dimensions				重量 Weight
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin	开式 Open (kg)
					RS.2RS	Open.Z.ZZ						
624	624-zz	624-2RS	1.16	0.40	38000	40000	48000	4	13	5	0.2	0.003
625	625-zz	625-2RS	1.47	0.60	32000	36000	43000	5	16	5	0.3	0.005
626	626-zz	626-2RS	2.20	0.91	30000	32000	40000	6	19	6	0.3	0.008
627	627-zz	627-2RS	3.32	1.38	28000	30000	36000	7	22	7	0.3	0.014
628	628-zz	628-2RS	3.35	1.40	24000	28000	34000	8	24	8	0.3	0.016
629	629-zz	629-2RS	4.45	1.95	22000	28000	34000	9	26	8	0.3	0.02
6200	6200-zz	6200-2RS	5.10	2.38	18000	24000	30000	10	30	9	0.6	0.03
6201	6201-zz	6201-2RS	6.82	3.05	17000	22000	28000	12	32	10	0.6	0.036
6202	6202-zz	6202-2RS	7.65	3.75	14000	20000	24000	15	35	11	0.6	0.045
6203	6203-zz	6203-2RS	9.85	4.78	12000	17000	20000	17	40	12	0.6	0.065
6204	6204-zz	6204-2RS	12.84	6.20	11000	15000	18000	20	47	14	1.0	0.105
6205	6205-zz	6205-2RS	14.01	6.98	9000	13000	15000	25	52	15	1.0	0.125
6206	6206-zz	6206-2RS	19.50	11.30	7500	11000	13000	30	62	16	1.0	0.205
6207	6207-zz	6207-2RS	25.70	15.30	6300	9500	11000	35	72	17	1.1	0.284
6208	6208-zz	6208-2RS	29.51	18.14	5600	8500	10000	40	80	18	1.1	0.366
6209	6209-zz	6209-2RS	31.50	20.40	5300	7500	9000	45	85	19	1.1	0.42
6210	6210-zz	6210-2RS	35.00	23.20	4800	7100	8500	50	90	20	1.1	0.459
62/22	62/22-zz	62/22-2RS	12.90	6.65	9700	12000	14000	22	50	14	1.0	0.119
62/28	62/28-zz	62/28-2RS	17.90	9.75	8100	9700	12000	28	58	16	1.0	0.175
62/32	62/32-zz	62/32-2RS	20.70	11.60	7100	8400	11000	32	65	17	1.0	0.225

PRODUCT SERIES
产品系列

NBGNB

63 系列轴承参数表/ 63 SERIES

轴承型号 Bearing NO.			额定负荷（kN） Load Rating		极限转速（rpm） Limiting Speed			外形尺寸（mm） Boundary dimensions				重量 Weight
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin	开式 Open (kg)
					RS.2RS	Open.Z.ZZ						
634	634-zz	634-2RS	0.73	0.67	32000	36000	43000	4	16	5	0.3	0.005
635	635-zz	635-2RS	2.28	1.08	30000	32000	40000	5	19	6	0.3	0.008
636	636-zz	636-2RS	3.30	1.37	28000	30000	36000	6	22	7	0.3	0.014
637	637-zz	637-2RS	4.55	1.95	22000	28000	34000	7	26	9	0.3	0.025
638	638-zz	638-2RS	4.55	1.95	22000	28000	34000	8	28	9	0.3	0.029
639	639-zz	639-2RS	5.10	2.38	20000	24000	30000	9	28	10	0.6	0.036
6300	6300-zz	6300-2RS	7.65	3.48	17000	22000	26000	10	35	11	0.6	0.049
6301	6301-zz	6301-2RS	9.72	4.23	16000	20000	24000	12	37	12	1.0	0.059
6302	6302-zz	6302-2RS	11.50	5.42	13000	17000	20000	15	42	13	1.0	0.082
6303	6303-zz	6303-2RS	13.56	6.56	11000	15000	18000	17	47	14	1.0	0.109
6304	6304-zz	6304-2RS	15.93	7.81	10000	14000	17000	20	52	15	1.1	0.142
6305	6305-zz	6305-2RS	22.40	11.50	8000	11000	13000	25	62	17	1.1	0.229
6306	6306-zz	6306-2RS	26.70	15.00	6700	9500	12000	30	72	19	1.1	0.34
6307	6307-zz	6307-2RS	33.50	19.20	6000	8500	10000	35	80	21	1.5	0.464
6308	6308-zz	6308-2RS	40.50	24.00	5300	7500	9000	40	90	23	1.5	0.636
6309	6309-zz	6309-2RS	53.00	32.00	4800	6700	8000	45	100	25	1.5	0.829
6310	6310-zz	6310-2RS	62.00	38.50	4300	6000	7500	50	110	27	2.0	1.06
63/22	63/22-zz	63/22-2RS	18.40	9.25	9200	11000	13000	22	56	16	1.1	0.179
63/28	63/28-zz	63/28-2RS	26.70	14.00	7400	8900	11000	28	68	18	1.1	0.287
63/32	63/32-zz	63/32-2RS	29.80	16.90	6500	7700	9500	32	75	20	1.1	0.389

67 系列轴承参数表/ 67 SERIES

轴承型号 Bearing NO.			额定负荷（kN） Load Rating		极限转速（rpm） Limiting Speed			外形尺寸（mm） Boundary dimensions				
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B		装配倒角 rmin
					RS.2RS	Open.Z.ZZ				open	zz.2RS	
6700	6700-ZZ	6700-2RS	0.572	0.304	-	-	-	10	15	3	4	0.1
6701	6701-ZZ	6701-2RS	0.935	0.527	-	-	-	12	18	4	4	0.2
6702	6702-ZZ	6702-2RS	0.870	0.499	-	-	-	15	21	4	4	0.2
6703	6703-ZZ	6703-2RS	0.930	0.640	-	-	-	17	23	4	4	0.2
6704	6704-ZZ	6704-2RS	1.040	0.558	-	-	-	20	27	4	4	0.2
6705	6705-ZZ	6705-2RS	1.090	0.840	-	-	-	25	32	4	4	0.2
6706	6706-ZZ	6706-2RS	1.140	0.950	-	-	-	30	37	4	4	0.2
6707	6707-ZZ	6707-2RS	1.850	1.630	-	-	-	35	44	5	5	0.3
6708	6708-ZZ	6708-2RS	2.510	2.230	-	-	-	40	50	6	6	0.3
6709	6709-ZZ	6709-2RS	2.570	2.400	-	-	-	45	55	6	6	0.3
6710	6710-ZZ	6710-2RS	2.660	2.630	-	-	-	50	62	6	6	0.3

PRODUCT SERIES
产品系列

68 系列轴承参数表/ 68 SERIES

轴承型号 Bearing NO.			额定负荷（kN） Load Rating		极限转速（rpm） Limiting Speed			外形尺寸（mm） Boundary dimensions				重量 Weight 开式 Open (kg)
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin	
					RS.2RS	Open.Z.ZZ						
685	685-zz	685-2RS	0.715	0.281	40000	45000	53000	5	11	3/5	0.15	0.0019
686	686-zz	686-2RS	1.08	0.44	38000	40000	50000	6	13	3.5/5	0.15	0.0026
687	687-zz	687-2RS	1.17	0.51	34000	40000	45000	7	14	3.5/5	0.15	0.0029
688	688-zz	688-2RS	1.33	0.65	28000	36000	43000	8	16	4/5	0.2	0.004
689	689-zz	689-2RS	1.60	0.73	24000	36000	43000	9	17	4/5	0.2	0.0044
61800	61800-zz	61800-2RS	1.60	0.75	22000	34000	40000	10	19	5	0.3	0.005
61801	61801-zz	61801-2RS	1.92	1.04	20000	32000	38000	12	21	5	0.3	0.007
61802	61802-zz	61802-2RS	2.07	1.18	17000	28000	34000	15	24	5	0.3	0.008
61803	61803-zz	61803-2RS	2.18	1.28	15000	26000	30000	17	26	5	0.3	0.008
61804	61804-zz	61804-2RS	3.45	2.25	13000	22000	26000	20	32	7	0.3	0.02
61805	61805-zz	61805-2RS	3.70	2.65	10000	18000	22000	25	37	7	0.3	0.022
61806	61806-zz	61806-2RS	4.04	3.14	9000	15000	18000	30	42	7	0.3	0.026
61807	61807-zz	61807-2RS	4.27	3.59	7500	14000	16000	35	47	7	0.3	0.03
61808	61808-zz	61808-2RS	6.35	5.55	6700	12000	14000	40	52	7	0.3	0.034
61809	61809-zz	61809-2RS	6.57	5.88	6000	11000	13000	45	58	7	0.3	0.04
61810	61810-zz	61810-2RS	6.40	5.80	5300	9500	11000	50	65	7	0.3	0.057

69 系列轴承参数表/ 69 SERIES

轴承型号 Bearing NO.			额定负荷（kN） Load Rating		极限转速（rpm） Limiting Speed			外形尺寸（mm） Boundary dimensions				重量 Weight
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin	开式 Open (kg)
					RS.2RS	Open.Z.ZZ						
693	693-zz	693-2RS	0.560	0.179	55000	60000	67000	3	8	3/4	0.15	0.00083
694	694-zz	694-2RS	0.960	0.345	43000	48000	56000	4	11	4	0.15	0.00175
695	695-zz	695-2RS	1.07	0.42	40000	43000	50000	5	13	4	0.2	0.0025
696	696-zz	696-2RS	1.47	0.60	34000	40000	45000	6	15	5	0.3	0.0043
697	697-zz	697-2RS	1.61	0.71	30000	36000	43000	7	17	5	0.3	0.0048
698	698-zz	698-2RS	2.22	0.91	30000	36000	43000	8	19	6	0.3	0.0068
699	699-zz	699-2RS	2.48	1.09	24000	34000	40000	9	20	6	0.3	0.0085
61900	61900-zz	61900-2RS	2.70	1.27	22000	32000	38000	10	22	6	0.3	0.011
61901	61901-zz	61901-2RS	2.89	1.46	20000	30000	36000	12	24	6	0.3	0.013
61902	61902-zz	61902-2RS	4.32	2.25	17000	26000	30000	15	28	7	0.3	0.016
61903	61903-zz	61903-2RS	4.58	2.56	15000	24000	28000	17	30	7	0.3	0.018
61904	61904-zz	61904-2RS	6.38	3.68	12000	19000	22000	20	37	9	0.3	0.036
61905	61905-zz	61905-2RS	6.65	4.20	10000	16000	19000	25	42	9	0.3	0.042
61906	61906-zz	61906-2RS	7.25	5.00	8500	14000	17000	30	47	9	0.3	0.049
61907	61907-zz	61907-2RS	8.00	5.67	7500	12000	15000	35	55	10	0.6	0.086
61908	61908-zz	61908-2RS	13.02	9.21	6300	11000	13000	40	62	12	0.6	0.112
61909	61909-zz	61909-2RS	14.10	10.90	5600	9500	12000	45	68	12	0.6	0.126
61910	61910-zz	61910-2RS	14.50	11.70	5300	9000	11000	50	72	12	0.6	0.135

PRODUCT SERIES
产品系列

NBGNB

62000 系列轴承参数表 / 62000 SERIES

轴承型号 Bearing NO.			额定负荷（kN） Load Rating		极限转速（rpm） Limiting Speed			外形尺寸（mm） Boundary dimensions			
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin
					RS.2RS	Open.Z.ZZ					
62000	62000-zz	62000-2RS	4.45	1.95	22000	30000	36000	10	26	10	0.3
62001	62001-zz	62001-2RS	5.10	2.38	18000	28000	32000	12	28	10	0.3
62200	62200-zz	62200-2RS	5.10	2.38	18000	24000	30000	10	30	14	0.6
62201	62201-zz	62201-2RS	6.82	3.05	17000	22000	28000	12	32	14	0.6
62202	62202-zz	62202-2RS	7.65	3.75	14000	20000	24000	15	35	14	0.6
62203	62203-zz	62203-2RS	9.58	4.78	12000	17000	20000	17	40	16	0.6
62204	62204-zz	62204-2RS	12.84	6.20	11000	15000	18000	20	47	18	1.0
62205	62205-zz	62205-2RS	14.01	6.98	9000	13000	15000	25	52	18	1.0
62206	62206-zz	62206-2RS	19.50	11.30	7500	11000	13000	30	62	20	1.0
62207	62207-zz	62207-2RS	25.70	15.30	6300	9500	11000	35	72	23	1.1
62208	62208-zz	62208-2RS	29.51	18.14	5600	8500	10000	40	80	23	1.1
62209	62209-zz	62209-2RS	31.50	20.40	5300	7500	9000	45	85	23	1.1
62210	62210-zz	62210-2RS	35.00	23.20	4800	7100	8500	50	90	23	1.1

16 系列轴承参数表/ 16 SERIES

轴承型号 Bearing NO.			额定负荷（kN） Load Rating		极限转速（rpm） Limiting Speed			外形尺寸（mm） Boundary dimensions			
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease		油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B	装配倒角 rmin
					RS.2RS	Open.Z.ZZ					
16000	16000-zz	16000-2RS	5.10	2.38	17000	24000	28000	10	28	8	0.3
16001	-	-	4.03	1.98	-	20000	26000	12	28	7	0.3
16002	-	-	5.58	2.85	-	19000	24000	15	32	8	0.3
16003	-	-	6.00	3.25	-	18000	22000	17	35	8	0.3
16004	-	-	6.34	3.76	-	16000	19000	20	42	8	0.6
16005	-	-	9.50	5.76	-	13000	17000	25	47	8	0.6
16006	-	-	9.94	6.55	-	11000	14000	30	55	9	1.0
16007	-	-	12.20	8.85	-	9500	12000	35	62	9	1.0
16008	-	-	12.60	9.65	-	9000	11000	40	68	9	1.0
16009	-	-	14.90	11.40	-	8500	10000	45	75	10	1.0
16010	-	-	15.40	12.40	-	8000	9500	50	80	10	1.0

PRODUCT SERIES
产品系列

NBGNB

R 系列轴承参数表 / R SERIES

轴承型号 Bearing NO.			额定负荷（kN） Load Rating		极限转速（rpm） Limiting Speed		外形尺寸（mm） Boundary dimensions			
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease	油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B （开式/闭式）	装配倒角 rmin
R2A	R2A-zz	R2A-2RS	0.64	0.23	56000	67000	3.175	12.7	3.969/4.366	0.15
R3	R3-zz	R3-2RS	1.07	0.42	43000	50000	4.762	12.7	3.969/4.978	0.15
R4	R4-zz	R4-2RS	1.47	0.60	38000	45000	6.35	15.875	4.978/4.978	0.3
R4A	R4A-zz	R4A-2RS	2.22	0.91	36000	43000	6.35	19.05	5.556/7.144	0.3
R6	R6-zz	R6-2RS	3.35	1.40	32000	38000	9.525	22.225	5.556/7.144	0.3
R8	R8-zz	R8-2RS	5.10	2.38	26000	32000	12.7	28.575	6.35/7.938	0.3
R10	R10-zz	R10-2RS	6.00	3.25	22000	26000	15.875	34.925	7.144/8.731	0.6
R12	R12-zz	R12-2RS	9.38	5.02	17000	19000	19.05	41.275	7.938/11.112	0.6
R14	R14-zz	R14-2RS	10.06	5.67	13000	17000	22.225	47.625	9.525/12.7	0.6
R16	R16-zz	R16-2RS	10.06	5.67	12000	16000	25.4	50.8	9.525/12.7	0.6

F 系列轴承参数表 / F SERIES

轴承型号 Bearing No.	内径 (d)	外径 (D)	法兰外径 (D1)		宽度 (B)		法兰宽度 (C)		基本额定动负荷 Cr (N)	基本额定静负荷 Cor (N)	极限转速 (rpm) Limiting Speed	
			open	ZZ2Rs	open	ZZ2Rs	open	ZZ2Rs			脂润滑 Grease	油润滑 Oil
F694zz	4	11	12.5		4	4	1	1	957	350	44000	49000
F604zz	4	12	13.5		4	4	1	1	957	350	41000	46000
F624zz	4	13	15		5	5	1	1	1301	488	39000	44000
F634zz	4	16	18		5	5	1	1	1340	523	33000	37000
F695zz	5	13	15		4	4	1	1	1077	432	37000	41000
F605zz	5	14	16		5	5	1	1	1329	507	35000	39000
F625zz	5	16	18		5	5	1	1	1729	675	31000	35000
F635zz	5	19	22		6	6	1.5	1.5	2336	896	28000	31000
F696zz	6	15	17		5	5	1.2	1.2	1340	523	31000	35000
F606zz	6	17	19		6	6	1.2	1.2	2263	846	29000	32000
F626zz	6	19	22		6	6	1.5	1.5	2336	896	26000	30000
MF117zz	7	11	12.2		2.5	3	0.6	0.6	455	202	37000	41000
MF137zz	7	13	14.2	14.6	3	4	0.6	0.8	541	276	33000	37000
F687zz	7	14	16		3.5	5	1	1.1	1173	513	31000	35000
F697zz	7	17	19		5	5	1.2	1.2	1605	719	28000	31000
F607zz	7	19	22		6	6	1.5	1.5	2336	896	25000	28000
F627zz	7	22	25		7	7	1.5	1.5	3287	1376	23000	26000
MF128zz	8	12	13.2	13.6	2.5	3.5	0.6	0.8	543	274	33000	37000
MF148zz	8	14	15.6		3.5	4	0.8	0.8	817	386	30000	34000
F688zz	8	16	22		4	5	1	1.1	1252	592	28000	31000
F698zz	8	19	25		6	6	1.5	1.5	2237	917	24000	27000
F608zz	8	22	22		7	7	1.5	1.5	3293	1379	22000	25000
F689zz	9	17	19		4	4	1	1.1	1327	668	25000	28000
F699zz	9	20	23		6	6	1.5	1.5	2467	1081	23000	26000
F609zz	9	24	27		7	7	1.5	1.5	3350	1400	20000	22000
F6800zz	10	19	21		5	5	1	1	1700	800	23000	26000
F6900zz	10	22	25		6	6	1.5	1.5	2611	1223	21000	23000
F6000zz	10	26	28		8	8	2	2	4580	1980	20000	28000
F6801zz	12	21	28		5	5	0.8	1	1911	1041	20000	22000
F6901zz	12	24	26.5		6	6	1	1.5	2831	1411	18000	21000

PRODUCT SERIES
产品系列

NBGNB

MR 系列轴承参数表 / MR SERIES

轴承型号 Bearing NO.			额定负荷 (kN) Load Rating		极限转速 (rpm) Limiting Speed		外形尺寸 (mm) Boundary dimensions			
开式 open	带防尘盖 with shields	带密封圈 with seals	Cr	Cor	脂润滑 Grease	油润滑 open. Z.ZZ	内径 d	外径 D	宽度 B (开式/闭式)	装配倒角 rmin
MR104	MR104-zz	MR104-2RS	0.710	0.270	50000	60000	4	10	3/4	0.20
MR105	MR105-zz	MR105-2RS	0.430	0.168	50000	60000	5	10	3/4	0.15
MR115	MR115-zz	MR115-2RS	0.715	0.276	43000	50000	5	11	4/4	0.15
MR106	MR106-zz	MR106-2RS	0.495	0.218	45000	53000	6	10	2.5/3	0.15
MR126	MR126-zz	MR126-2RS	0.715	0.292	43000	50000	6	12	3/4	0.2
MR117	MR117-zz	MR117-2RS	0.455	0.201	43000	50000	7	11	2.5/3	0.15
MR137	MR137-zz	MR137-2RS	0.540	0.276	40000	48000	7	13	3/4	0.2
MR128	MR128-zz	MR128-2RS	0.545	0.274	40000	48000	8	12	2.5/3.5	0.15
MR148	MR148-zz	MR148-2RS	0.820	0.385	32000	43000	8	14	3.5/4	0.2
-	MR15267-zz	MR15267-2RS	3.050	1.660	26000	30000	15	26	7	0.3
-	MR15268-zz	MR15268-2RS	3.050	1.660	26000	30000	15	26	8	0.3
-	MR16267-zz	MR16267-2RS	2.180	1.280	24000	28000	16	26	7	0.3
-	MR15307-zz	MR15307-2RS	4.300	2.320	24000	28000	15	30	7	0.3
-	MR18307-zz	MR18307-2RS	4.300	2.320	24000	28000	18	30	7	0.2
-	MR16287-zz	MR16287-2RS	3.200	1.860	24000	28000	16	28	7	0.2
-	MR17287-zz	MR17287-2RS	3.200	1.860	24000	28000	17	28	7	0.2
-	MR2437-zz	MR2437-2RS	5.200	3.450	17000	20000	24	37	7	0.3
-	MR2237E-zz	MR2237E-2RS	6.360	3.710	12000	15000	24	37	外8/内11.5	0.3

深沟球轴承振动加速度级限值 / Vibration acceleration level limit of deep groove ball bearing

单个轴承振动加速度级（dB）不超过																
轴承公称外径 D（mm）		0直径系列					2直径系列					3直径系列				
>	≤	Z	Z1	Z2	Z3	Z4	Z	Z1	Z2	Z3	Z4	Z	Z1	Z2	Z3	Z4
10	15	36	33	30	27	24	36	33	30	27	24	41	37	33	29	25
15	20	37	34	31	28	25	37	34	31	28	25	42	38	34	30	26
20	25	38	35	32	29	26	40	37	33	29	26	43	39	33	31	27
25	30	39	36	33	30	27	41	38	34	30	27	44	40	36	31	27
30	40	41	38	35	32	29	42	39	36	33	30	46	42	38	33	29
40	50	43	40	37	34	31	44	41	38	35	32	48	44	40	35	31
50	60	45	42	39	36	33	46	43	40	37	34	50	46	42	37	33
60	70	48	45	42	38	35	49	46	42	39	36	52	48	44	39	35
70	80	50	47	44	40	37	51	48	44	41	38	54	50	46	41	37
80	90	52	49	46	42	39	53	50	46	43	40	57	53	48	43	39
90	100	54	51	48	44	41	55	52	48	45	42	59	55	50	45	41
100	110	56	53	50	46	43	58	54	50	47	44	61	57	52	47	43
110	120	58	55	52	48	45	60	56	52	49	46	63	59	54	49	45

深沟球轴承振动速度级限值 / Vibration speed level limit of deep groove ball bearings

轴承公称外径 D（mm）		V			V1			V2			V3			V4		
>	≤	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
mm		μm/s														
10	15	110	60	60	80	40	40	55	28	28	40	18	18	28	12	12
15	20	145	70	70	110	50	50	65	30	30	45	18	18	32	12	12
20	25	185	85	95	120	55	60	80	35	35	52	20	20	35	12	12
25	30	225	100	125	145	65	75	95	40	45	60	25	25	38	15	15
30	40	265	120	170	170	75	100	110	50	65	70	32	35	45	20	20
40	50	310	140	220	195	90	130	125	60	85	80	38	50	50	25	30
50	60	360	160	270	225	105	165	145	70	105	90	45	65	55	30	40
60	70	410	185	320	255	120	200	165	80	125	105	52	80	65	35	50
70	80	460	210	370	285	135	235	185	90	145	120	60	95	75	40	60
80	90	510	240	430	320	155	270	205	100	170	135	68	110	85	45	70
90	100	560	270	490	355	175	310	225	110	195	150	75	125	95	50	80
100	110	610	300	550	390	195	350	250	120	220	165	82	140	105	55	90
110	120	660	330	610	425	125	390	275	130	245	180	90	155	115	60	100